


This product is intended for installation only by expert users. Please consult with a qualified technician for installation. Improper installation may result in damage to your equipment.

Before you start using this product please follow these basic guidelines:

1. Please carefully read through the instruction manual before beginning the installation process.
2. Please remove your graphics card from your motherboard to insure the safest process and in order to prevent any possible damages to your CPU and motherboard.
3. It is strongly recommended to use market proven pre-mix coolant, such as Thermaltake Coolant 1000.

Parts List

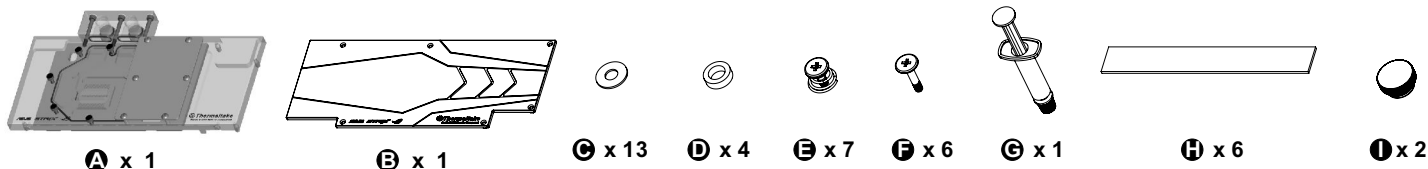

1

Remove original VGA stock cooler (Remove the screws circled on the diagram. All heat sink assembly screws should be removed)

2

Remove the power connector

3

Clean the original thermal compound off the GPU die and remove the screws to detach the backplate. (Carefully detach the original stock cooler after removing all screws securing the cooler to the board)

4

Remove the power connector

5

Apply thermal compound

6

Cut the thermal pads to the dimensions listed and place them on the spots shown on the diagram.

7


8

When installing the water block, carefully position the water block with the preinstalled standoffs on the graphics card.


9

Finish


Parts List




J x 1
Controller




K x 1
Controller Cable



L x 1
Power Cable




M x 1
Bridge Cable



N x 1
Velcro


Installation Guide

10

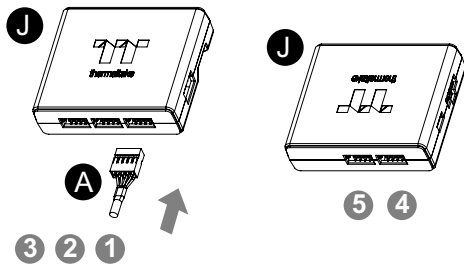


Connect the fan cable onto the controller.

11

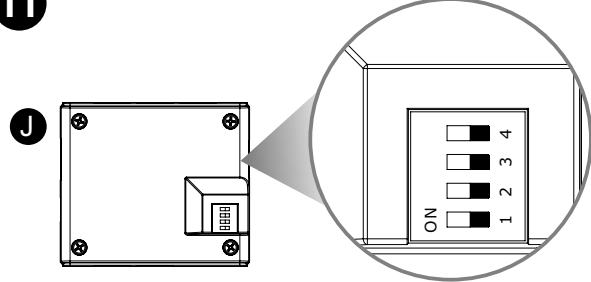


Set the DIP switch on the back side of the controller to assign the number of the controller

12

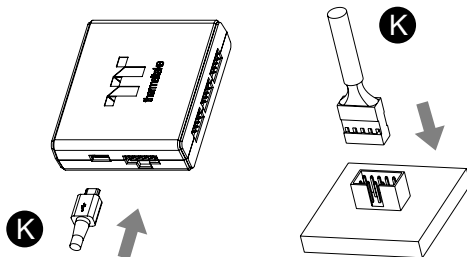


Connect the controller cable onto the mainboard (USB 2.0 9 pin) and controller.

13

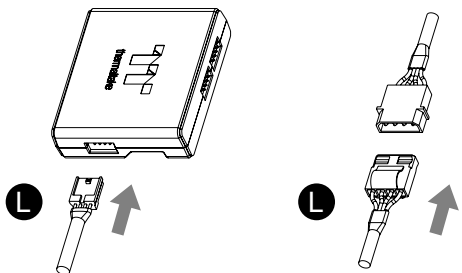

Connect the power cable to the 4pin Molex connector and controller.

14

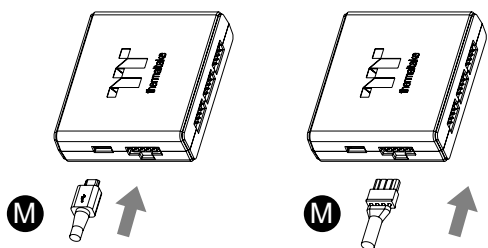

If you want to connect two or more connectors, you can use the bridge cable to connect the controllers.

